

10/02/00
jc893 U.S. PTO

10-04-00

A

Express Mail Certificate under 37 C.F.R. 1.10

Date of Deposit: October 2, 2000

Express Mail Mailing Number: EK891768928US

I hereby certify that the following items are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR § 1.10 on the date indicated above and as addressed to the Assistant Commissioner for Patents, Washington, D. C. 20231.

Karen Hart

Signature of Person Signing

Karen Hart

Typed Name of Person Signing

jc920 U.S. PTO
09/677476
10/02/00

October 2, 2000

Box Patent Application

Assistant Commissioner for Patents

Washington, D. C. 20231

Re: System and Method for Visually Representing a Hierarchical Database
and its Similarity Relationships by John R. Ripley, Steven C. Wotring and
Gordon C. Hicks
Docket No. 800433

Sir:

Transmitted herewith for filing are:

- (1) 30 page patent specification including identification of the names of all inventors, 19 claims and Abstract; and
- (2) 15 sheets of drawings (Figs. 1-15).

Pursuant to 37 C. F. R. § 1.10, the Applicants requests the Patent and Trademark Office to accept this application and accord a serial number and filing date as of the date this application is deposited with the U. S. Postal Service for Express Mail. Please date stamp and return the enclosed postcard to evidence receipt of these materials.

Please direct all correspondence as follows:

Douglas D. Russell, Reg. No. 40,152
Taylor Russell & Russell, P. C.
4807 Spicewood Springs Road
Building One, Suite 1200
Austin, TX 78759-8444
Phone: 512-338-4601

Respectfully Submitted,

Gail M. Taylor Russell

Gail M. Taylor Russell
Reg. No. 36,290

09677476 100200

**SYSTEM AND METHOD FOR VISUALLY REPRESENTING HIERARCHICAL
DATABASE OBJECTS AND THEIR SIMILARITY RELATIONSHIPS TO
OTHER OBJECTS IN THE DATABASE**

by

5 John R. Ripley, Steve C. Wotring and Gordon C. Hicks

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims the benefit of U.S. Provisional Application No. 60/157,476, filed October 1, 1999.

FIELD OF THE INVENTION

10 The invention relates generally to database visualization, the visual representation of a database. In particular, this invention relates to the field of visually representing the contents of a hierarchical database and its interrelationships. The invention may be used to visually represent any type of hierarchical database but is particularly useful in visually representing the results of searches, particularly similarity type searches, performed on
15 hierarchical databases.

BACKGROUND OF THE INVENTION

With the proliferation of online commerce and automated systems, the amount of data that is being stored in databases has risen dramatically. With this steep increase in database size and transaction volumes, the ability to find information in a database without a reference has become extremely difficult. To help ameliorate these problems,
20 database visualization has emerged. Database visualization is the process of displaying data and its interrelationships visually, rather than textually. Database visualization

allows a user to peruse large amounts of data in order to unearth trends and other knowledge that might otherwise go undetected.

25 This application is related to United States Patent Application Number 09/401,101 entitled "System and Method for Performing Similarity Searching" by David B. Wheeler and Matthew J. Clay, filed on September 22, 1999, and provisional patent application number 60/157,477 entitled "System and Method for Transforming a Relational Database to a Hierarchical Database" by John R. Ripley and Steven C. 30 Wotring, filed on October 1, 1999. Both applications are incorporated by reference herein.

SUMMARY OF THE INVENTION

35 The current invention provides a system and method for visually representing hierarchical database objects and their interrelationships. The invention provides a process for visually representing hierarchical database objects contained in a hierarchical document, as well as their similarities to other database objects in the hierarchical database management system. A user has the ability to perform a quicklink search which is a similarity search on specified attributes of a database object. The quicklink search comprises a predefined query that specifies a similarity scoring method for a single data 40 base object. The search criteria for the quicklink search may be defined, for example, when a schema for the hierarchical database is defined. The quicklink search can examine multiple documents across multiple databases. The results of the quicklink search are returned in the form of a visual representation of the relationships and similarities among applicable data, as delineated by the user in setting the quicklink 45 search criteria. The current invention allows visual document objects that are related to

hierarchical database objects to be stored and in turn used in database visualization. Visual edge objects, which represent the relationships between hierarchical database objects are generated, stored and used in the database visualization. The current invention allows for multiple visual displays to be generated for a visualization model. The present invention comprises a computer-implemented visualization model of similarity relationships between documents. It comprises performing a similarity search based on at least one attribute of a reference document to find at least one target document with similar attributes; creating a visual representation of the reference database document and the at least one target document; creating a visual representation of the similarities between the reference document and at least one target document; and displaying the visual representations of the database documents and their similarities on a graphical user interface. The target documents that are similarity searched may reside in a plurality of databases. The similarity search returns a result set of target documents that are used by the visualization model to create the visual representation of the documents and the similarities between the documents.

The present invention is a computer-implemented interactive visualization model of similarity relationships between documents. It comprises using a similarity search performed on attributes of a reference document which results in a set of 0 to n target documents with similar attributes; creating a visual representation of the reference document and each target document; creating a visual representation of similarities between the reference document and each target document; and displaying the visual representation of the reference documents and each target document and their similarities on a graphical user interface. The method further comprises allowing a user using the

graphical user interface to initiate the similarity search and select the attributes of the
70 reference document to be used in the similarity search. The method further comprises
allowing a user using the graphical user interface to choose any attributes of the reference
document to be used in the similarity search. Attributes of the target document may be
used as a source for a new similarity search.

The present invention also comprises a computer-implemented visualization
75 model of similarities between documents. It comprises displaying a reference hierarchical
object (a reference model node); allowing a user to initiate a similarity search, based on at
least one attribute of the reference hierarchical object, to find at least one target
hierarchical objects (a target model node); visually representing the reference model node
and at least one target model node that meets a similarity search criteria; visually
80 representing the similarities between the reference model node and each target model
node as a model edge; displaying the visual representations of the model node and model
edge on a graphical user interface. The model node comprises a reference to the
hierarchical object the model node represents; a reference to at least one attribute of the
hierarchical object used in the similarity search if a model edge exists; and visual
85 properties of the hierarchical document the model node represents. The visual
representation of the reference model node, each target model node, and each model edge
may be stored in computer memory or on disk.

The model edge comprises an identifier of the reference model node from which
the visual representation of the model edge will extend and an identifier of at least one
90 target model node to which the visual representation of the model edge will extend; and a
list of the similarity search attributes used in the similarity search. The method further

comprises user chosen attributes to be used in the similarity search. The present invention comprises a computer-implemented method of visualizing similarity relationships between documents. The method comprises using a reference hierarchical document; performing a similarity search based on user selected attributes of the reference hierarchical document and determining a result set of target documents comprising 0 to n hierarchical documents; converting each hierarchical document to a model node that visually represents each hierarchical document to be displayed on a graphical user interface; and using the similarity search results, creating a model edge that visually represents the similarities between the reference hierarchical document and each hierarchical document. The model edge and model node may be displayed on a graphical user interface. Each model edge indicates a degree of similarity between the reference hierarchical object and the target hierarchical object and the model edge may be displayed as a line connecting model nodes, where the model nodes are depicted as geometric shapes on the graphical user interface. The length of the line connecting the model nodes may vary as a function of the degree of similarity between the reference document and the target document referenced by the model nodes. The visual representation may be represented in many different ways including a three-dimensional representation.

The present invention comprises a computer-readable medium containing instructions implementing the above methods.

BRIEF DESCRIPTION OF DRAWINGS

Fig. 1 is a flow diagram illustrating an overview of the steps of the method of the current invention.

115 Fig. 2 is a flowchart illustrating an overview of the visualization model of the current invention.

Fig. 3 is a diagram displaying a detailed properties and architecture of the model nodes and edges of the current invention.

Fig. 4 is a flowchart displaying the process of visualizing quicklinks for a model node contained in the visualization model of the current invention.

Fig. 5 shows a graphical user interface for allowing a user to define linkable fields in a database schema.

Fig. 6 shows a graphical user interface for defining context mapping.

Fig. 7 shows a graphical user interface for allowing a user to specify a quick link query.

Fig. 8 shows a graphical user interface for allowing a user to run a quicklink query on selected model nodes.

Fig. 9 shows a graphical user interface for allowing a user to specify the linkable fields on which a quicklink query is to be run.

130 Fig. 10 shows the visualization model node objects displayed in visual two-dimensional hierarchical database objects.

Fig. 11 shows a representation of the two-dimensional visualization of the quicklink query results.

Fig. 12 shows the visualization model node objects displayed in three-dimensional hierarchical database object visualization.

Fig. 13 shows the visualization model node and edge objects displayed in three-dimensional hierarchical database object visualization.

Fig. 14 is a display of the three-dimensional (3D) result set visualization of a similarity search result set.

140 Fig. 15 shows a total similarity links starting point layout.

DETAILED DESCRIPTION

Fig. 1 shows a method, according to which hierarchical documents and result sets from similarity searching are incorporated into a visual structure. In accordance with step **101**, a user views an initial database object, which comprises a hierarchical document in a hierarchical database system. The user views the initial database object in the form of a Model Node, an entity that visually represents the hierarchical document and its attributes, or fields. In accordance with step **102**, the user determines that there is a need to find database objects that contain similar attributes. In accordance with step **103**, then, the user develops search criteria and uses it to submit quicklink queries to a query manager. A quicklink is a term relating to a connection between one document and another for a specified quicklinkable attribute. A quicklinkable field can be assigned non-context sensitive target fields that it can link to via a similarity search query. In addition, the user can specify a quicklink threshold percent value to define what percent match makes a quicklink between documents.

155 A separate quicklink search or query may be submitted for each attribute of the initial database object that needs to be searched. A quicklink search is a predefined query that specifies a similarity scoring method for a single database object. The quicklink search can be done on multiple documents across multiple databases. The search criteria for the quicklink search may be defined when a schema for the hierarchical database is defined. In accordance with step **104**, the query manager feeds the quicklink queries to a

160

similarity search process that returns a similarity search result. The similarity search process used in the present invention may be any type of process that results in a similarity search result being returned. While other similarity search processes may be used, the similarity search process described in United States Patent Application No. 09/401,101, filed on September 22, 1999, entitled "System and Method for Performing Similarity Searching" by David B. Wheeler and Matthew J. Clay describes one such similarity search process having a similarity search engine (SSE) that may be used in the present invention.

In accordance with step **105**, the similarity search process or the similarity search engine (SSE) performs a similarity search and returns a result set for each quicklink query. A separate result set is returned for each searched attribute of the initial database object. Each result set comprises zero or more database objects, and hence takes the form of zero or more hierarchical documents. Each result set also includes the relationship between the returned database objects and the initial database object. In accordance with step **106**, the SSE feeds the hierarchical documents of each result set to a visualization model. The visualization model holds the model edges and the model nodes and allows the system to maintain those properties. The visualization model interface allows a view of the visualization model to be created and displayed to the user.

In accordance with step **108**, each hierarchical document becomes a Model Node. A Model Node is an entity in a visualization model that relates to a document stored in a hierarchical format. A Model Node is actually a visual representation of a hierarchical document and includes properties that tie it to a hierarchical document and determine how the node should be displayed. In accordance with step **107**, the SSE feeds the result

set for each quicklink query to the visualization model. In accordance with step **109**,
185 each relationship between the returned database object(s) and the initial database objects
becomes a Model Edge. A Model Edge is an entity in a visualization model that relates to
a connection between two documents stored in a hierarchical format. A Model Edge has
properties for 'From Nodes' and 'To Nodes' (i.e. Documents). In addition, a Model Edge
has a query list that allows the user to add query attributes that link the two
190 documents/nodes together. In accordance with step **110**, the Model Nodes are displayed
as entities in a visual representation of related database objects, and the Model Nodes are
connected by the Model Edges, which visually illustrate the relationships among the
various Model Nodes.

To display hierarchical database data in visual form, a visualization model is
195 needed. Fig. 2 is a diagram that illustrates an overview of a visualization modeling
process, in accordance with the present invention. A similarity search returns a set of
results **201**. The result set **201** takes the form of hierarchical documents $1 \dots n$ **202**. Each
hierarchical document **202** becomes a Model Node **203**, an entity that can be displayed in
the visual structure that is created during the visualization modeling process. Each Model
200 Node **203** corresponds to a separate hierarchical document **202** and contains properties
that support the visual rendering of the hierarchical document **202**.

When a Model Node **204** is created, a lookup is performed on a Unique Nodes
List **206** of the visualization model **205**, to determine whether the node already exists. If
the node does not exist, the Model Node **203** is added to the Unique Nodes List **206** in a
205 view model **205**. The view model **205** holds Model Nodes and the Model Edges. All

nodes maintained by the view model **205** are held in the Unique Nodes List **206**, such that only one Model Node representation of each hierarchical document **202** is stored.

When visualizing data contained within hierarchical documents, it is paramount that the user can determine the relationships that a document holds to other documents in the system. Thus, the similarity searching result set also produces one or more Model Edges **204**, which correspond to the relationships among the hierarchical documents **202** that were returned from the similarity search result set **201**. These Model Edges **204** are used to connect the Model Nodes **203** that are displayed within the visual structure. The visual structure that will result from the Model Nodes **203** being connected to each other by the Model Edges **204** will illustrate the relationships among the separate hierarchical documents **202**. This allows the user to visually follow a 'similarity' paper trail of documents in the system. The Model Edges **204** are added to a Unique Edges List **207** in the view model **205**.

The view model **205** maintains properties for all listed unique nodes and edges, and updated nodes and edges, and it provides a Model Event Interface **210** that communicates with a Visualization Model Interface **211**. The Visualization Model Interface **211** creates views of the model. The Model Event Interface **210** and Visualization Model Interface **211** facilitate rendering the visual model in many different views **212**, such as 2-Dimensional, 3-Dimensional, Model Explorer, Cross Database View, Data Landscape View, and other suitable forms for viewing data and its interrelationships visually. The Visualization Model Interface **211** allows all supported views **212** to refresh their individual display structures, through the visualization model interface, in the manner best suited to each individual view **212**. The Model Event

Interface **210** and the Visualization Model Interface **211** use both the unique nodes list
230 and the unique edges lists to achieve this. When a Model Node **203** or a Model Edge **204**
is created, updated, changed, or deleted it is added to the Updated Nodes List **208** or the
Model Edges List **209**, respectively. A message is then communicated via the
Visualization Model Interface **211** that the visualization model **205** has been changed,
and each view **212** is then updated according to the Updated Nodes List **208** and the
235 Updated Edges List **209**.

Fig. 3 illustrates the properties contained in Model Node architecture **301** and the
properties contained in Model Edge architecture **302**, in accordance with the present
invention. The properties contained by the Model Node **301** and Model Edge **302** also
include properties that provide for the visual display of the Model Node. The properties
240 contained in the Model Node architecture **301** include a property, shown as "Form Item,"
which identifies the hierarchical document which the Model Node visually represents.
The Form Item essentially acts as a pointer to the hierarchical document represented by
the Model Node and includes the primary key of the hierarchical document, a document
summary and an internal representation of the document schema. The Link Count
245 identifies how many Model Edges are connected to this Model Node. The Hidden Count
identifies how many of the Model Edges associated with this Model Node are hidden for
display purposes. Locked identifies whether a node can be hidden from display. Color
identifies the display color. Selected identifies the Model Node selected for processing.
ID is the unique Model Node identifier. Hierarchical Level identifies the position of the
250 object represented by the Model Node, within the hierarchy of objects displayed by the
visualization model.

The Model Edge architecture **302** contains properties that provide for the visual representation of relationships that exist among the hierarchical database objects that are shown as the Model Nodes. The properties contained in the Model Edge architecture **302** include properties that identify at least one Model Node from which the Model Edge will extend and at least Model Node to which it will extend. These Model Nodes may be identified generally, as “From Node” and “To Node.” The From Node is a pointer to the starting node while the From Node ID is the identifier of the starting node. The To Node is a pointer to the receiving end node while the To Node ID is an identifier of the node. The properties contained in the Model Edge architecture **302** also include a “Query List.” The Query List stores query criteria used by the visualization model to establish the relationships that are visually represented by the Model Edge. Caption includes any caption that is displayed along with the hierarchical object that is visually represented by the Model Node. Likewise, Color identifies the displayed color of the Model Edge. The properties contained by the Model Node architecture **301** may also include an identifier, shown as “ID,” in order to provide consistent reference to the particular Model Node throughout the visualization model. Visible determines whether the Model Edges is currently visible. Selected identifies the Model Edge selected for processing. ID is the unique Model Edge identifier.

Fig. 4 is a flowchart of the quicklink query process, in which each visualization Model Node is created from a hierarchical document, as described with reference to Figs. 1 and 2. Fig. 4 utilizes an example application of the current invention, a document from a database of known offenders, in order to display its method. A user views a visual representation of at least one database object, including the initial Model Node **401**. The

275 initial Model Node **401** contains in its properties a Form Item, as described with
reference to Fig. 3. The Form Item corresponds to the hierarchical document **402** that the
initial Model Node **401** visually illustrates. The hierarchical document **402** contains at
least one quicklinkable attribute, or field. The user devises separate quicklink queries
403 for each quicklinkable attribute of the hierarchical document **402** that the user wishes
280 to search. The user submits these quicklink queries **403** to a query manager **404**. The
query manager **404** then submits, to a similarity search engine (SSE) **405**, separate search
commands that correspond to each quicklink query. The similarity search engine **405**
may comprise any search engine suitable for searching a hierarchical database system and
returning at least one set of results in the form of related hierarchical documents. The
285 search engine may be of the type specified in the U.S. Patent Application 09/401,101,
titled "System and Method for Performing Similarity Searching," filed on September 22,
1999.

Separate result sets **406** are returned by the similarity search engine **405** for each
quicklink query **403** that was submitted to the query manager **404**. Thus, a separate result
290 set **406** is returned that corresponds to each quicklinkable field of the hierarchical
document **402** that was searched by the user. Each result set **406** contains an anchor
document, the query criteria, and the target documents that were returned by the
similarity search engine **405**. Each result set **406** is added to the visualization model **407**.
Each result set **406** is interpreted by the visualization model **407**, and a Unique Model
295 Node **408** is created for every document contained in the result set. The visualization
then attempts to add each Unique Model Node to the Unique Nodes List, described with

reference to Fig. 2. A Unique Model Node **408** is added to the Unique Nodes List, if a matching node does not already exist.

The visualization model **407** then creates Model Edges by establishing
300 relationships between the anchor document of each result set **406** and each target document returned in the result set **406**. For each anchor document/target document relationship, a Unique Model Edge **409** is created. The Unique Model Edge **409** stores the relationship of a unique link between the target and anchor documents, in addition to the query criteria that created the link. For each Unique Model Edge **409** that is created
305 between anchor and target documents, the query criteria are added to the query list property of the Unique Model Edge **409**, described with reference to Fig. 3. The Unique Model Edge **409** is then added to the Unique Edges List, described with reference to Fig. 2, if a matching Model Edge does not already exist. If a matching Model Edge already exists between two documents, then the query attributes that created the more recent
310 Model Edge are simply added to the existing Model Edge's query list.

Fig. 5 is an illustration of an example graphical user interface (GUI) **500** that may be used in implementing the current invention. The GUI **500** allows a user to edit settings and quicklinkable field parameters. A first area **501** of the GUI **500** allows the user to select the database object field for within the hierarchical database schema shown
315 in **501** for which the settings will be edited. Selection may be made using any suitable means for selecting an entity within a GUI, such as marking checkboxes or highlighting the entities.

Upon the user's selecting an object field, a second area **502** of the GUI **500** allows the user to display and edit settings with regard to the field that the user selected. The

in the quicklink search, failing the specification of parameters in the Quicklink Settings described above. Default measures, default weighting and use of a tokenizer may be set, and the user may select to enter a separate GUI for editing context mapping parameters, described with reference to Fig. 6 below.

Fig. 6 shows a graphical user interface (GUI) **600** that allows users to define context mapping parameters for the selected field. Context mapping allows the user to specify other fields within the database objects that the selected field will quicklink to.

The user may specify any field in any database within the hierarchical database management system (HDBMS) to which the invented method is applied. A HDBMS may contain many separate hierarchical database schemae. Thus, the context mapping may be inter-schema or intra-schema. The GUI **600** shows a first area **601**, in which various databases are listed. The user selects a database that contains objects that the user wishes to search. For example, the user may select the database shown as "DB_3." However, the user may not wish to search all fields of the objects in DB_3. Thus, the user may use a second area **602** of the GUI **600** for selecting the fields to which an edited field may be quicklinked. Thus, if the field being edited by the user, as described with reference to Fig. 5, is "First Name," then the user may select only to search through the "First Name" fields of the objects in Test_DB_500K. Thus, the user would select DB_3/Name-Standard/First Name. Selection may be made using any suitable means for selecting an entity within a GUI, such as marking checkboxes or highlighting the entities.

Fig. 7 shows a graphical user interface (GUI) **700** for allowing a user to specify a quicklink query. The user can run the quicklink query on the entire Model Node or select fields within the Model Node on which to run the query as shown in Fig. 8.

Fig. 8 shows a graphical user interface (GUI) **800** for allowing a user to run a quicklink query on selected nodes.

Fig. 9 shows a graphical user interface (GUI) **900** for allowing a user to specify the quicklinkable fields within one or more databases on which a query is to be run.

Fig. 10 shows a graphical user interface (GUI) **1000** that displays hierarchical database objects as two-dimensional visualization Model Nodes **1001**. The two-dimensional visualization hierarchical database objects act as a conduit between a hierarchical database and a visualization model by providing the user with a visual representation of hierarchical data objects. Users may then select visual objects, the Model Nodes **1001**, and run a quicklink query search on them. As yet, there are no Mode Edges displayed, because no similarity relationships have been established among the Model Nodes **1001**.

Fig. 11 shows a graphical user interface (GUI) **1100** that displays hierarchical database objects as two-dimensional visualization Model Nodes **1101**, **1102**, and **1103**, and displays the relationships among them as Model Edges **1104**. This two-dimensional rendering of Model Nodes **1101**, **1102**, and **1103**, and Model Edges **1104** acts as one of the views supported by the visualization model, as described with reference to Fig. 2. The visualization model is the result of a user selecting the visualization Model Nodes described with reference to Fig. 10 and running a quicklink query search on them. The results of the search display some Model Nodes that were not represented among those selected by the user.

Each Model Node **1101**, **1102**, and **1103** in the visualization model is rendered as a geometric shape. The shape is presented in a color that is pre-assigned to the database,

in which the object represented by the Model Node **1101**, **1102**, and **1103** is stored. Each
390 Model Edge **1104** in the visualization model is rendered as a line between two Model
Nodes. Each Model Edge **1104** represents a similarity relationship between the database
objects that are represented by two Model Nodes.

A center Model Node **1101** represents the quicklink anchor document, described
with reference to Fig. 4. The surrounding Model Nodes **1102** represent the target
395 documents that have been found to be similarly related to the anchor document. The
Model Edges **1104** connect the center Model Node **1101** to the surrounding Model Nodes
1102, thereby showing which documents are related to the anchor document represented
by the center Model Node **1101**. The unjoined Model Nodes **1103** represent documents
that are not sufficiently similar to the anchor document, as defined by the threshold set by
400 the user in the GUI described with reference to Fig. 5. Thus, no Model Edges connect
them to the center Model node **1101**.

Fig. 12 shows an illustration **1200** of hierarchical documents as three-dimensional
Model Nodes **1201**. The three-dimensional visualization hierarchical database objects act
as a conduit between a hierarchical database and a visualization model, by providing the
405 user with a visual representation of hierarchical data objects. Users may then select
visual objects, the Model Nodes **1201**, and run a quicklink query search on them. As yet,
there are no Mode Edges displayed, because no similarity relationships have been
established among the Model Nodes **1201**.

Fig. 13 shows an illustration **1300** of hierarchical documents as three-dimensional
410 Model Nodes **1301**, **1302**, and **1303**, and displays the relationships among them as Model
Edges **1304**. This three-dimensional rendering of Model Nodes **1301**, **1302**, and **1303**,

and Model Edges **1304** acts as one of the views supported by the visualization model, as described with reference to Fig. 2. The three-dimensional hierarchical database object visualization acts as a conduit between a hierarchical database and a visualization model, by providing the user with a visual representation of hierarchical data objects and the similarity relationships among them. The visualization model is the result of a user selecting the visualization Model Nodes described with reference to Fig. 12 and running a quicklink query search on them. The results of the search display some Model Nodes that were not represented among those selected by the user.

Each Model Node **1301**, **1302**, and **1303**, in the visualization model is rendered as a geometric shape. The shape is presented in a color that is pre-assigned to the database, in which the object represented by the Model Node **1301**, **1302**, and **1303**, is stored. Each Model Edge **1304** in the visualization model is rendered as a line between two Model Nodes. Each Model Edge **1304** represents a similarity relationship between the database objects that are represented by two Model Nodes.

A center Model Node **1301** represents the quicklink anchor document, described with reference to Fig. 4. The surrounding Model Nodes **1302** represent the target documents that have been found to be similarly related to the anchor document. The Model Edges **1304** connect the center Model Node **1301** to the surrounding Model Nodes **1302**, thereby showing which documents are related to the anchor document represented by the center Model Node **1301**. The unjoined Model Nodes **1303** represent documents that are not sufficiently similar to the anchor document, as defined by the threshold set by the user in the GUI described with reference to Fig. 5. Thus, no Model Edges connect them to the center Model node **1301**.

In the embodiment shown in Fig. 11, the Model Nodes **1301**, **1302**, and **1303**, are represented as square blocks of varying heights. The height of each Model Node **1301**, **1302**, and **1303**, is determined by the number of links between the Model Node and another Model Node. When a link is made from a Model Node to another Model Node, the height of each is increased by one unit. The user may set the measure of a unit of height. In the embodiment shown in Fig. 11, a Model Node that is one unit high becomes a cube. For instance, since no links have been made from or to the unjoined Model Nodes **1303**, they each have a height of zero (0). Since each of the five surrounding Model Nodes **1302** are linked to the center block **1301**, each surrounding Model Node **1302** is one unit high, and the center Model Node **1302** is five units high.

Fig. 14 displays a similarity search result set in three-dimensions. The visual representation enables a user to simultaneously inspect many hierarchical objects that are included in the similarity search result set. The user may also inspect the degree of similarity between the search ‘anchor’ object and each of the ‘target’ cases that have been included in the result set, with reference to each attribute or field searched. The attributes, or fields, that were used to form the search criteria are aligned along the X-axis. The attributes are placed in order by the structure of the database schema being visually represented. For example, if Fig. 14 represented a database schema whose attributes were arranged in order from “Name” to “Eye Color,” then Attribute 1 **1401** in Fig. 14 would be “Name,” and Attribute N **1403** would be “Eye Color.”

Model Nodes **1402** are placed along slices of the Y-axis. In the embodiment shown in Fig. 14, the Model Nodes **1402** comprise similarity search score ‘blocks.’ A row of Model Nodes **1402**, viewed from front to back in Fig. 14, denotes a single target

document: a hierarchical database object that is contained in a similarity search result set.

A Model Node **1402** corresponding to an attribute of the hierarchical document is

460 displayed at each X-Y intersection in the row.

A Z-axis represents similarity search score, with similarity increasing as one moves up the Z-axis. In the embodiment shown in Fig. 14, the terminus at the top of the Z-axis represents 100% similarity between the attribute of a target document and the same attribute in the anchor document. The Z-axis may be made to run from 0-+100%,
465 or from -100% - +100%. Where similarities are not absolute, a user may elect to have the Z-axis run from 0-+∞, or from -∞ to +∞. The degrees of similarities represented by the Model Nodes **1402** are calculated relative to one another, and the heights of the blocks along the Z-axis are set proportionally in the visual representation.

A 2D value based visualization is the ability to visually display similarity
470 relationships in a hierarchical database. Each rectangle, or other geometric shape, would denote a particular value that is stored in a hierarchical database object, such as a phone number. A line between any two geometric shapes would denote a similarity relationship link through a hierarchical database object. The visual relationship can be stated as, “Phone Number 305-0257 has a similarity relationship to Phone Number 305-0250 in
475 Claim Numbers 1, 2 and 3”.

In addition to the features described in 2D value-based visualization, the 3D value based visualization renders the picture in three dimensions. For every geometric shape contained in a chart, a geometric node block is rendered where the height of the block is determined by the number of edges, or lines, that connect to the object. In addition, each
480 height unit of the block can be rendered in a different color, depending on the database

from which links the two values together. Every edge, or link, is rendered in the same fashion as 2D value-based visualization.

Fig. 15 shows a second embodiment of a method for displaying a similarity search result set in three-dimensions. This embodiment also allows the user to peruse a large amount of data, in order to discover similarity trends and anomalies in the objects of a hierarchical database. The visual representation enables a user to simultaneously inspect many hierarchical objects that are included in the similarity search result set. The user may also inspect the degree of similarity between the search 'anchor' object and each of the 'target' cases that have been included in the result set, with reference to each attribute or field searched. The attributes, or fields, that were used to form the search criteria are aligned along the X-axis. The attributes are placed in order by the structure of the database schema being visually represented. For example, if Fig. 15 represented a database schema whose attributes were arranged in order from "Name" to "Eye Color," then Attribute 1 **1501** in Fig. 14 would be "Name," and Attribute *N* **1503** would be "Eye Color."

Model Nodes **1502** are placed along slices of the Y-axis. In the embodiment shown in Fig. 15, the Model Nodes **1502** comprise similarity search score 'blocks.' A row of Model Nodes **1502**, viewed from front to back in Fig. 14, denotes a single target document: a hierarchical database object that is contained in a similarity search result set. A Model Node **1502** corresponding to an attribute of the hierarchical document is displayed at each X-Y intersection in the row.

A Z-axis represents similarity search score, with similarity increasing as one moves up the Z-axis. The Z-axis may be made to run from 0-+100%, or from -100% -

+100%. Where similarities are not absolute, a user may elect to have the Z-axis run from
505 0- $+\infty$, or from $-\infty$ to $+\infty$. The Z-axis may also be used to represent a less relative
similarity for each attribute of the documents. In the embodiment shown in Fig. 15, for
example, the Z-axis represents the number of quicklinks to each document for a given
attribute. The height of each Model Node **1502** is determined by the number of edges, or
lines, that connect to the object in a two-dimensional representation, such as that
510 described with reference to Fig. 11; or in a three-dimensional representation, such as that
shown in Fig. 13. The heights of the Model Nodes **1502** are set proportionally in the
visual representation.

In the embodiment shown by Fig. 15, the manner of displaying the Model Nodes
1502 differs from the embodiment shown by Fig. 14. Each height unit of each Model
515 Node **1502** is rendered in a different color represented in the figure by the variations in
shading. The user is given the ability to view a number of hierarchical database objects
and all of the similarity relationships for each attribute contained within the object. The
user can select and define a schema criteria and similarity score tolerance. Every
hierarchical database object may be displayed as a node stack where the different colors
520 (here represented by shading) represent similarity counts for different items in the
schema. The nodes stacks may be displayed on a three dimensional grid in a format that
can be ordered by the user based on criteria that may be selected by the user.

Using the foregoing, the invention may be implemented using standard
programming or engineering techniques including computer programming software,
525 firmware, hardware or any combination or subset thereof. Any such resulting program,
having a computer readable program code means, may be embodied or provided within

one or more computer readable or usable media, thereby making a computer program product, i.e., an article of manufacture, according to the invention. The computer readable media may be, for instance, a fixed (hard) drive, disk, diskette, optical disk, magnetic tape, semiconductor memory such as read-only memory (ROM), or any transmitting/receiving medium such as the Internet or other communication network or link. The article of manufacture containing the computer programming code may be made and/or used by executing the code directly from one medium, by copying the code from one medium to another medium, or by transmitting the code over a network.

530

535

An apparatus for making, using or selling the invention may be one or more processing systems including, but not limited to, a central processing unit (CPU), memory, storage devices, communication links, communication devices, server, I/O devices, or any sub-components or individual parts of one or more processing systems, including software, firmware, hardware or any combination or subset thereof, which embody the invention as set forth in the claims.

540

User input may be received from the keyboard, mouse, pen, voice, touch screen, or any other means by which a human can input data to a computer, including through other programs such as application programs.

545

Although the present invention has been described in detail with reference to certain preferred embodiments, it should be apparent that modifications and adaptations to those embodiments may occur to persons skilled in the art without departing from the spirit and scope of the present invention.

1 What is claimed is:

- 2 1. A computer-implemented visualization model of similarity relationships between
3 documents comprising:
4 performing a similarity search based on at least one attribute of a reference
5 document to find at least one target document with similar attributes;
6 creating a visual representation of the reference database document and the at
7 least one target document;
8 creating a visual representation of the similarities between the reference document
9 and the at least one target document; and
10 displaying the visual representations of the database documents and their
11 similarities on a graphical user interface.
- 1 2. The method according to claim 1 wherein the at least one target documents that
2 are similarity searched reside in a plurality of databases.
- 1 3. The method according to claim 1 wherein the similarity search returns a result set
2 of target documents that are used by the visualization model to create the visual
3 representation of the documents and the similarities between the documents.
- 1 4. A computer-implemented interactive visualization model of similarity
2 relationships between documents comprising:
3 using a similarity search performed on attributes of a reference document which
4 results in a set of 0 to n target documents with similar attributes;
5 creating a visual representation of the reference document and each target
6 document;

- 7 creating a visual representation of similarities between the reference document
- 8 and each target document; and
- 9 displaying the visual representation of the reference documents and each target
- 10 document and their similarities on a graphical user interface.
- 1 5. The method of claim 4 further comprising allowing a user using the graphical user
- 2 interface to initiate the similarity search and select the attributes of the reference
- 3 document to be used in the similarity search.
- 1 6. The method of claim 4 further comprising allowing a user using the graphical user
- 2 interface to choose any attributes of the reference document to be used in the
- 3 similarity search.
- 1 7. The method of claim 6 further comprising using attributes of a target document as
- 2 a source for a new similarity search.
- 1 8. A computer-implemented visualization model of similarities between documents
- 2 comprising:
- 3 displaying a reference hierarchical object (a reference model node);
- 4 allowing a user to initiate a similarity search, based on at least one attribute of the
- 5 reference hierarchical object, to find at least one target hierarchical objects (a
- 6 target model node);
- 7 visually representing the reference model node and the at least one target model
- 8 node that meet a similarity search criteria;
- 9 visually representing the similarities between the reference model node and each
- 10 target model node as a model edge;

11 displaying the visual representations of the model node and model edge on a
 12 graphical user interface.

1 9. The method according to claim 8 wherein the model node comprises:
 2 a reference to the hierarchical object the model node represents;
 3 a reference to at least one attribute of the hierarchical object used in the similarity
 4 search if a model edge exists; and
 5 visual properties of the hierarchical document the model node represents.

1 10. The method according to claim 8 further comprising storing the visual
 2 representation of the reference model node, each target model node, and each
 3 model edge in computer memory or on disk.

1 11. The method according to claim 8 wherein the model edge comprises:
 2 an identifier of the reference model node from which the visual representation of
 3 the model edge will extend and an identifier of the at least one target model node
 4 to which the visual representation of the model edge will extend; and
 5 a list of the similarity search attributes used in the similarity search.

1 12. The method according to claim 11 further comprising user chosen attributes to be
 2 used in the similarity search.

1 13. A computer-implemented method of visualizing similarity relationships between
 2 documents comprising:
 3 using a reference hierarchical document;
 4 performing a similarity search based on user selected attributes of the reference
 5 hierarchical document and determining a result set of target documents
 6 comprising 0 to n hierarchical documents;

converting each hierarchical document to a model node that visually represents each hierarchical document to be displayed on a graphical user interface; and using the similarity search results, creating a model edge that visually represents the similarities between the reference hierarchical document and each hierarchical document in the result set to be displayed on a graphical user interface.

14. The method of claim 13 further comprising displaying the model edge, model node on a graphical user interface.

15. The method of claim 8, wherein each model edge indicates a degree of similarity between the reference hierarchical object and the target hierarchical object is displayed as a line connecting model nodes, said model nodes are depicted as geometric shapes on the graphical user interface.

16. The method of claim 15, wherein the length of the line connecting the model nodes varies as a function of the degree of similarity between the reference document and the target document referenced by the model nodes.

17. The method of claim 1, wherein the visual representation is three dimensional.

18. A computer-readable medium containing instructions for a visualization model of similarity relationships between documents comprising:
performing a similarity search based on at least one attribute of a reference document to find at least one target document with similar attributes;
creating a visual representation of the reference database document and the at least one target document;
creating a visual representation of the similarities between the reference document and the at least one target document; and

- 9 displaying the visual representations of the database documents and their
- 10 similarities on a graphical user interface.
- 1 19. A computer-readable medium containing instructions for a visualization model of
- 2 similarities between documents comprising:
- 3 displaying a reference hierarchical object (a reference model node);
- 4 allowing a user to initiate a similarity search, based on at least one attribute of the
- 5 reference hierarchical object, to find at least one target hierarchical objects (a
- 6 target model node);
- 7 visually representing the reference model node and the at least one target model
- 8 node that meet a similarity search criteria;
- 9 visually representing the similarities between the reference model node and each
- 10 target model node as a model edge;
- 11 displaying the visual representations of the model node and model edge on a
- 12 graphical user interface.

ABSTRACT

The present invention comprises a computer-implemented visualization model of similarity relationships between documents. It comprises performing a similarity search based on at least one attribute of a reference document to find at least one target document with similar attributes; creating a visual representation of the reference database document and the at least one target document; creating a visual representation of the similarities between the reference document and the at least one target document; and displaying the visual representations of the database documents and their similarities on a graphical user interface. The target documents that are similarity searched may reside in a plurality of databases. The similarity search returns a result set of target documents that are used by the visualization model to create the visual representation of the documents and the similarities between the documents.

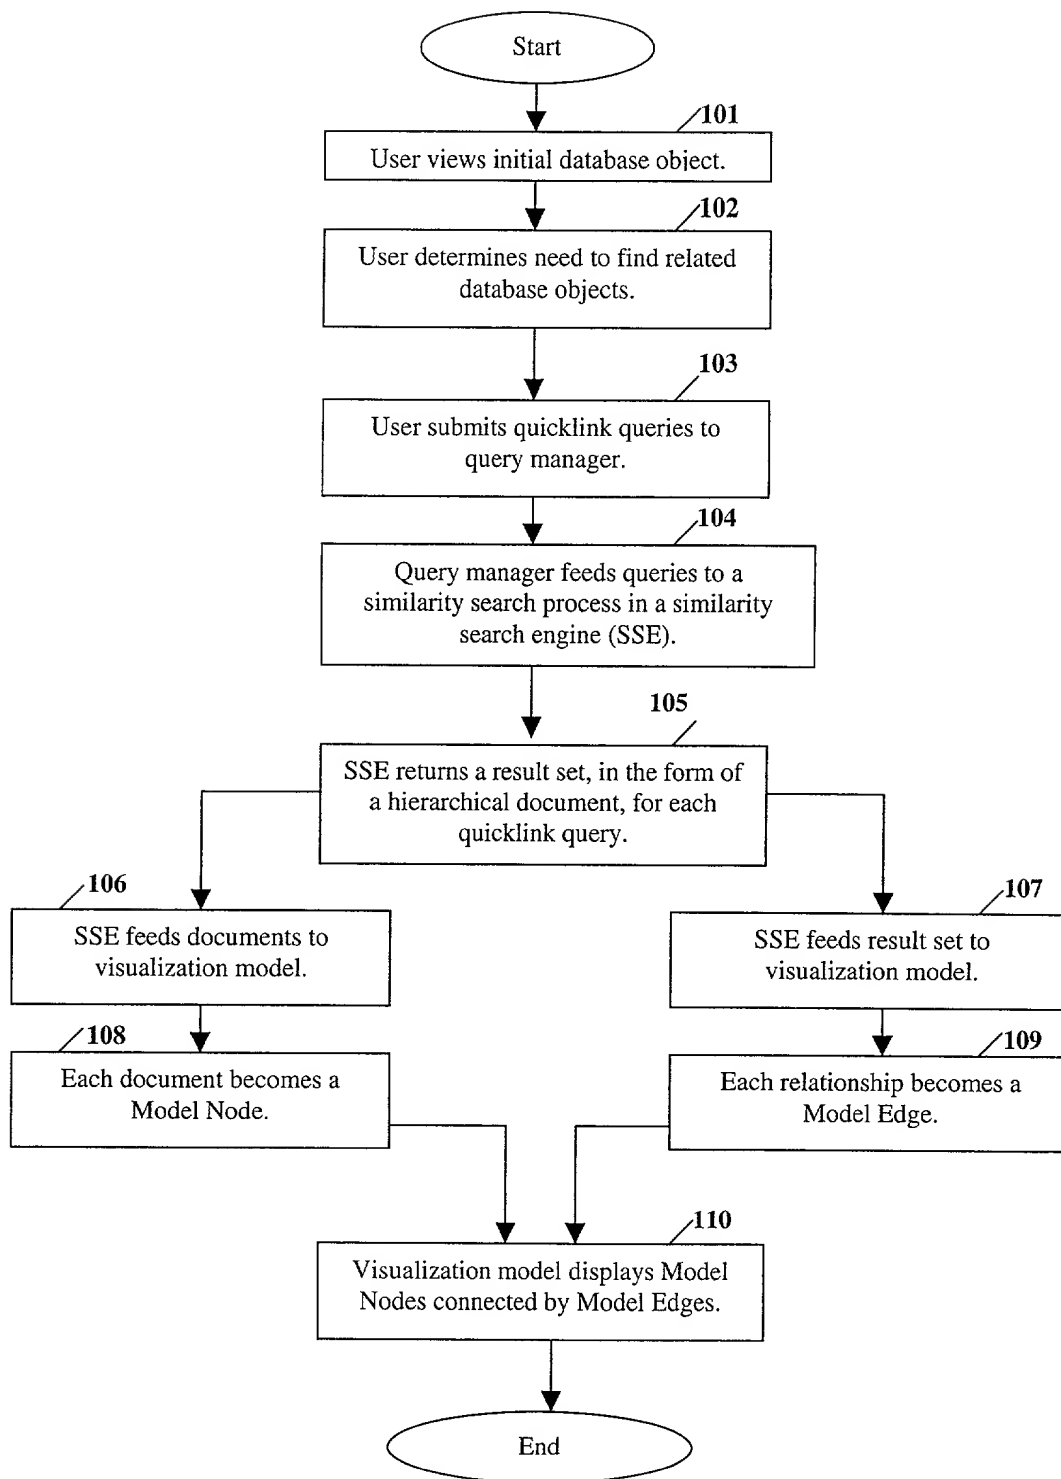


Fig. 1

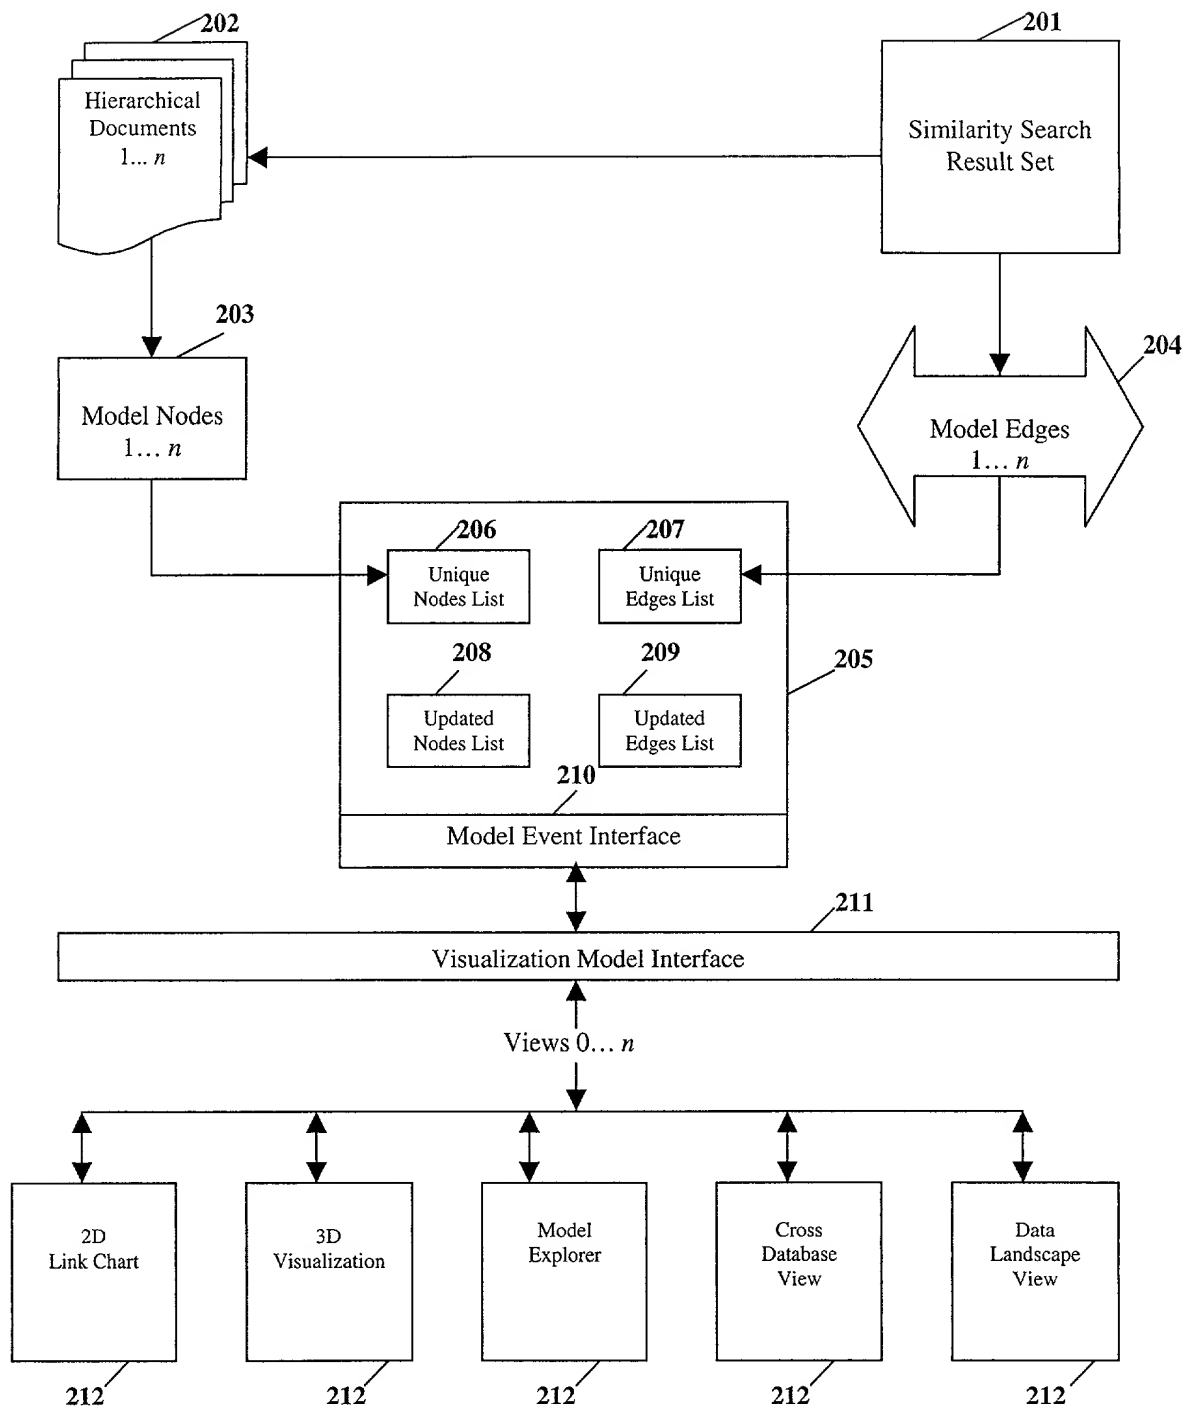


Fig. 2

301

MODEL NODE									
Form Item	Link Count	Group ID	Hidden Count	Locked	Caption	Color	Hierarch. Level	Selected	ID

302

MODEL EDGE									
From Node	From Node ID	To Node	To Node ID	Query List	Caption	Color	Visible	Selected	ID

Fig. 3

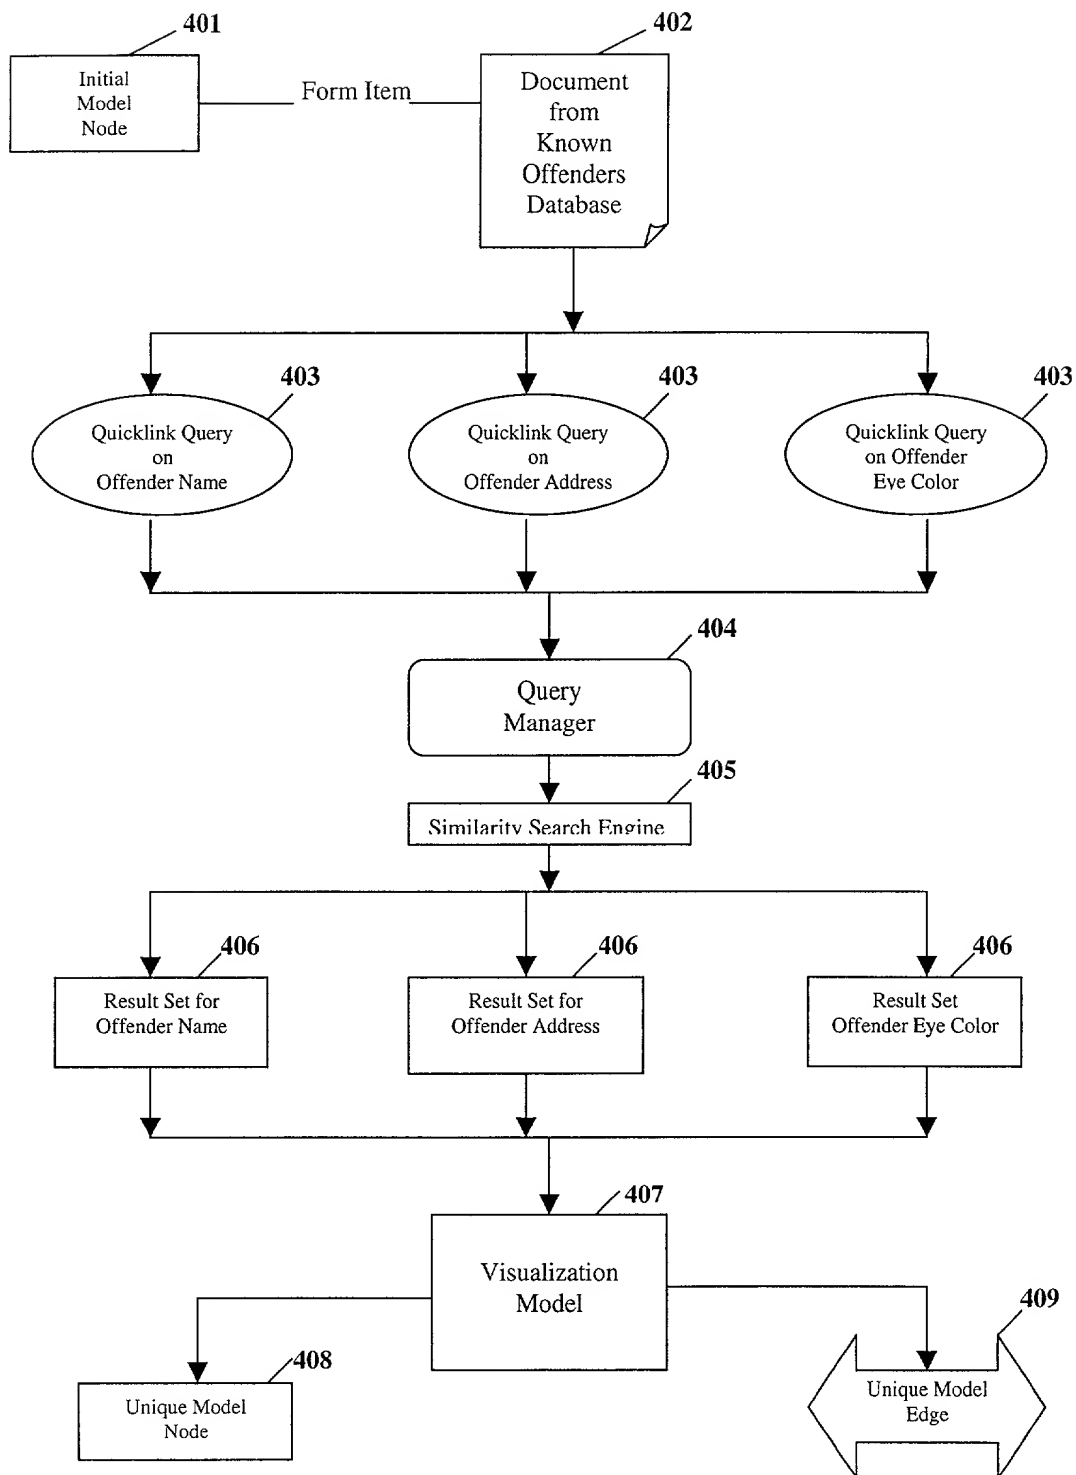


Fig. 4

<div><div>DB_3</div><div><div>Primary Key</div><div><div>Name - Standard</div><div><div>Honorarium</div><div>First</div><div>Middle</div><div>Last</div><div>Suffix</div></div></div><div><div>Address - Stand.</div><div>Code 2</div></div></div></div>	<div><div>Display Settings</div><div>Color (Background)</div><div>Color (Text)</div><div>Editor</div><div>Visible</div><div><div>General Settings</div><div>Data type</div><div>Description</div><div>Field Name</div><div>Key</div><div>Read Only</div><div>Required</div><div>Summary</div></div><div><div>QuickLink Settings</div><div>Allow QuickLinks</div><div>Context Mapping</div><div>Threshold</div></div><div><div>SSE Settings</div><div>Context Mapping</div><div>Default Measure</div><div>Default Weight</div><div>Tokenizer</div></div></div>	<div><div>White</div><div>Black</div><div>Text</div><div>Visible</div><div><div>Text</div><div>First</div><div>FIRST</div><div><div><div></div></div></div><div><div><div></div></div></div><div><div><div></div></div></div><div><div><div></div></div></div></div><div><div><div></div></div></div><div><div>[...]</div></div><div>99%</div><div><div>[]</div></div><div>Name</div><div>30%</div></div>
--	---	--

501

502

Fig. 5

600

Databases	Order	Question	Data Type
DB_1	<input type="checkbox"/> 1	DB_3\Name – Standard\Honorary	Text
DB_2	<input type="checkbox"/> 2	DB_3\Name – Standard\First	Text
DB_3	<input type="checkbox"/> 3	DB_3\Name – Standard\Middle	Text
	<input type="checkbox"/> 4	DB_3\Name – Standard\Last	Text
	<input type="checkbox"/> 5	DB_3\Name – Standard\Suffix	Text
	<input type="checkbox"/> 6	DB_3\Address – Standard\Street	Text
	<input type="checkbox"/> 7	DB_3\Address – Standard\Apt	Text
	<input type="checkbox"/> 8	DB_3\Address – Standard\City	Text
	<input type="checkbox"/> 9	DB_3\Address – Standard\County	Text
	<input type="checkbox"/> 10	DB_3\Address – Standard\Country	Text

601

602

Fig. 6

1203598800
Calvin
A
Arroyo
43078 kennedy dr. Vicksburg Ny 89001

Fig. 7

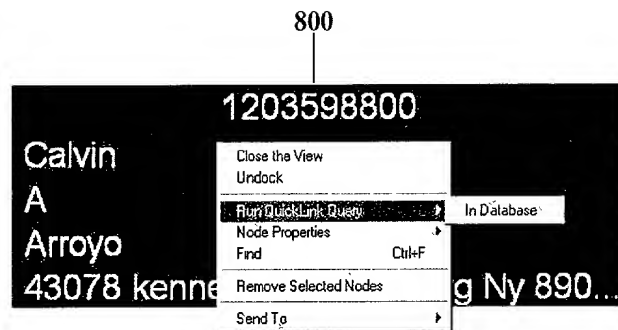


Fig. 8

Databases	Order	Question	Data Type
DB_3	<input type="checkbox"/> 1	DB_3\Name – Standard\First	Text
	<input type="checkbox"/> 2	DB_3\Name – Standard\Last	Text

Fig. 9

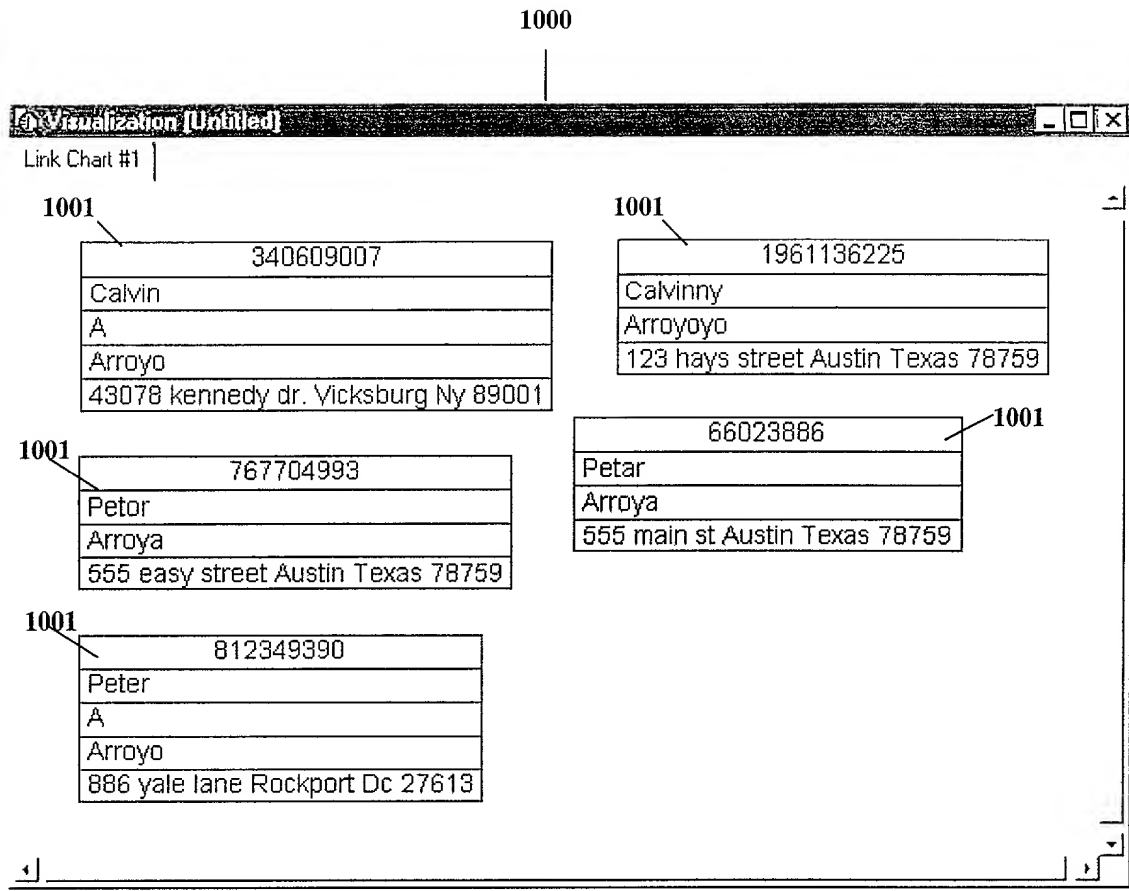


Fig. 10

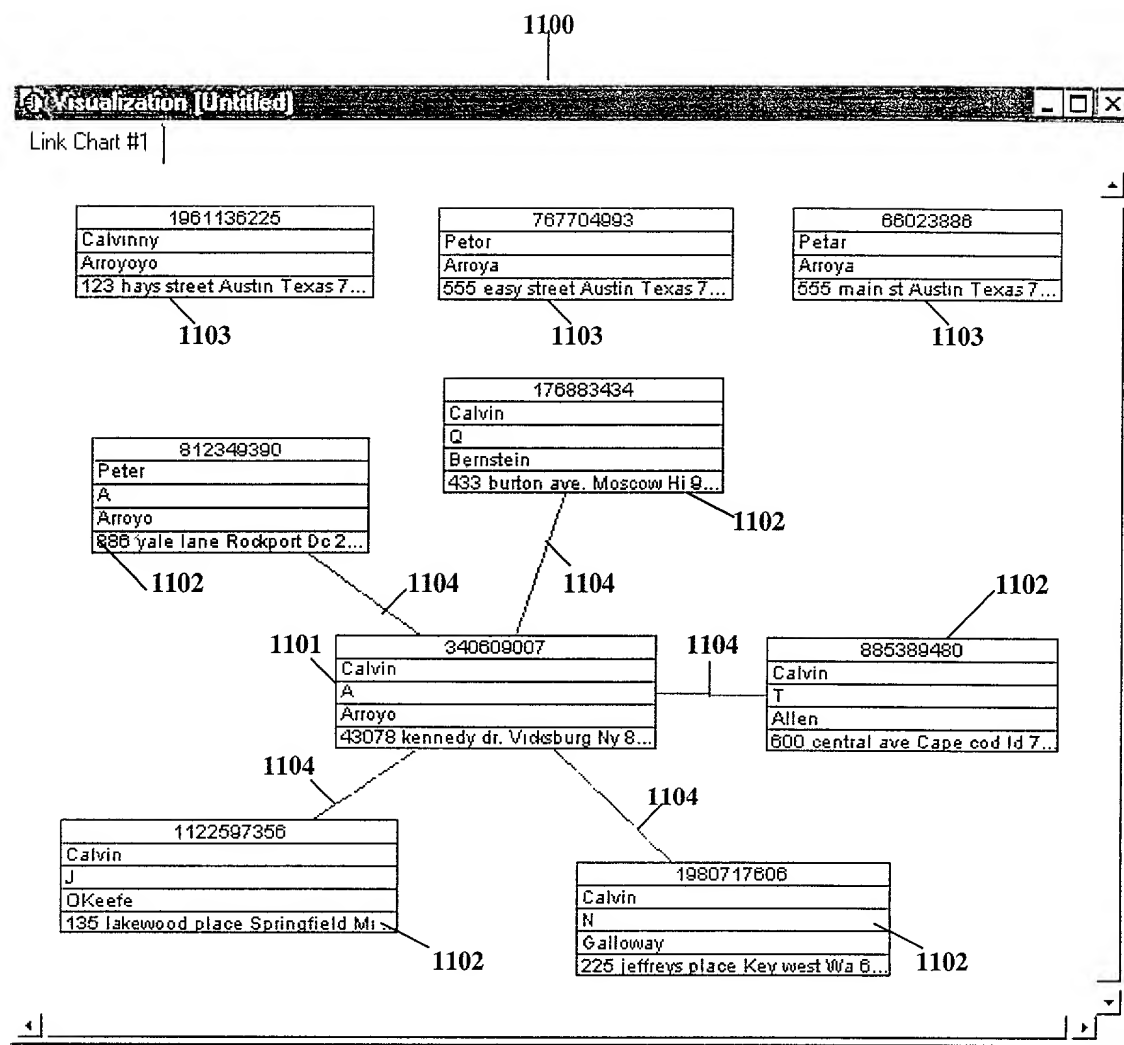


Fig. 11

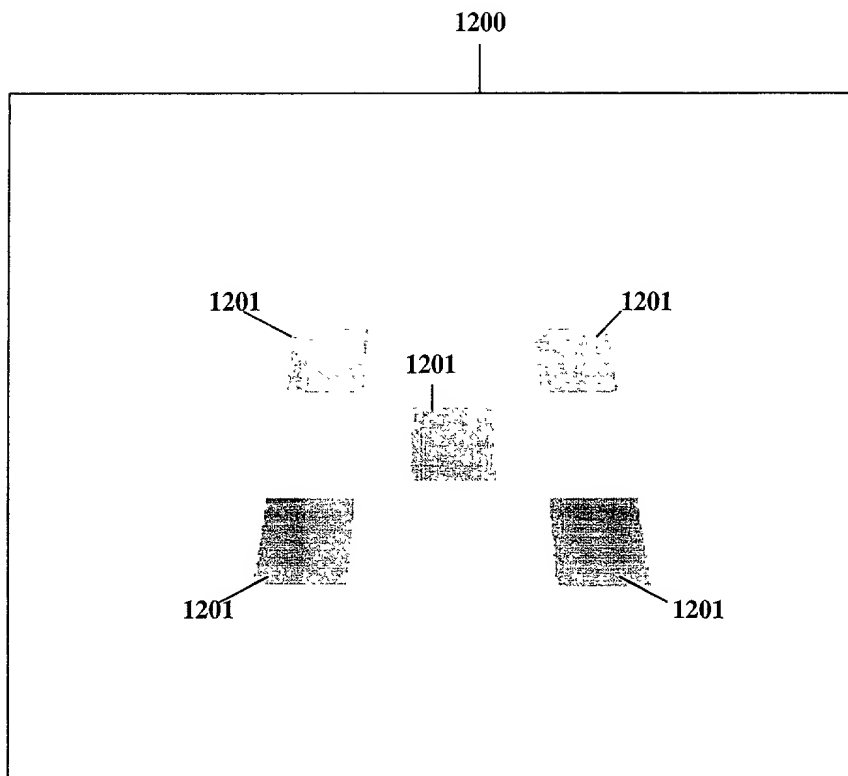


Fig. 12

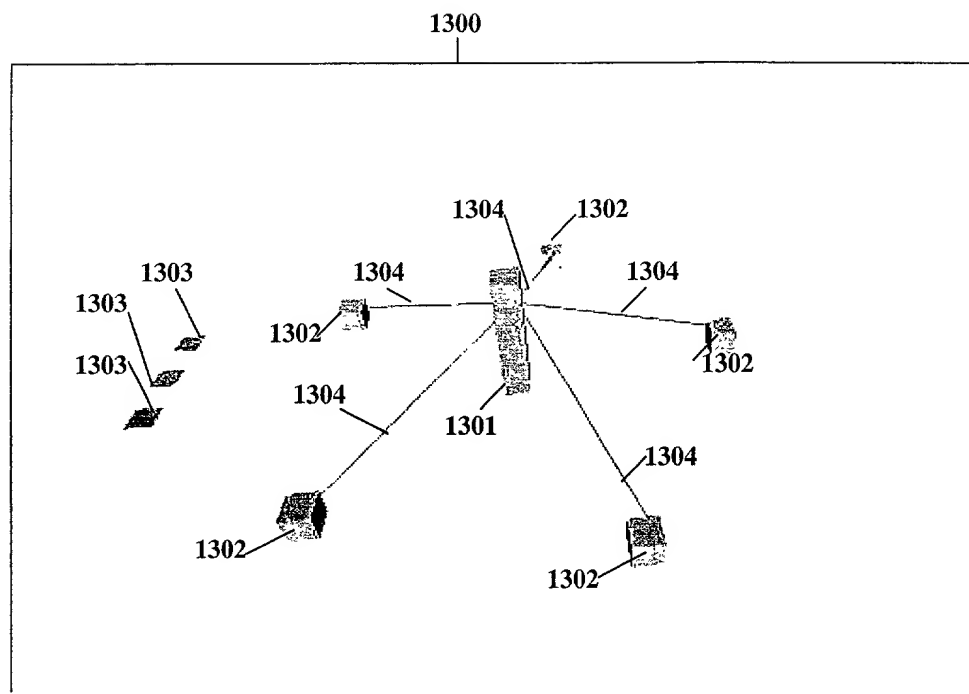


Fig. 13

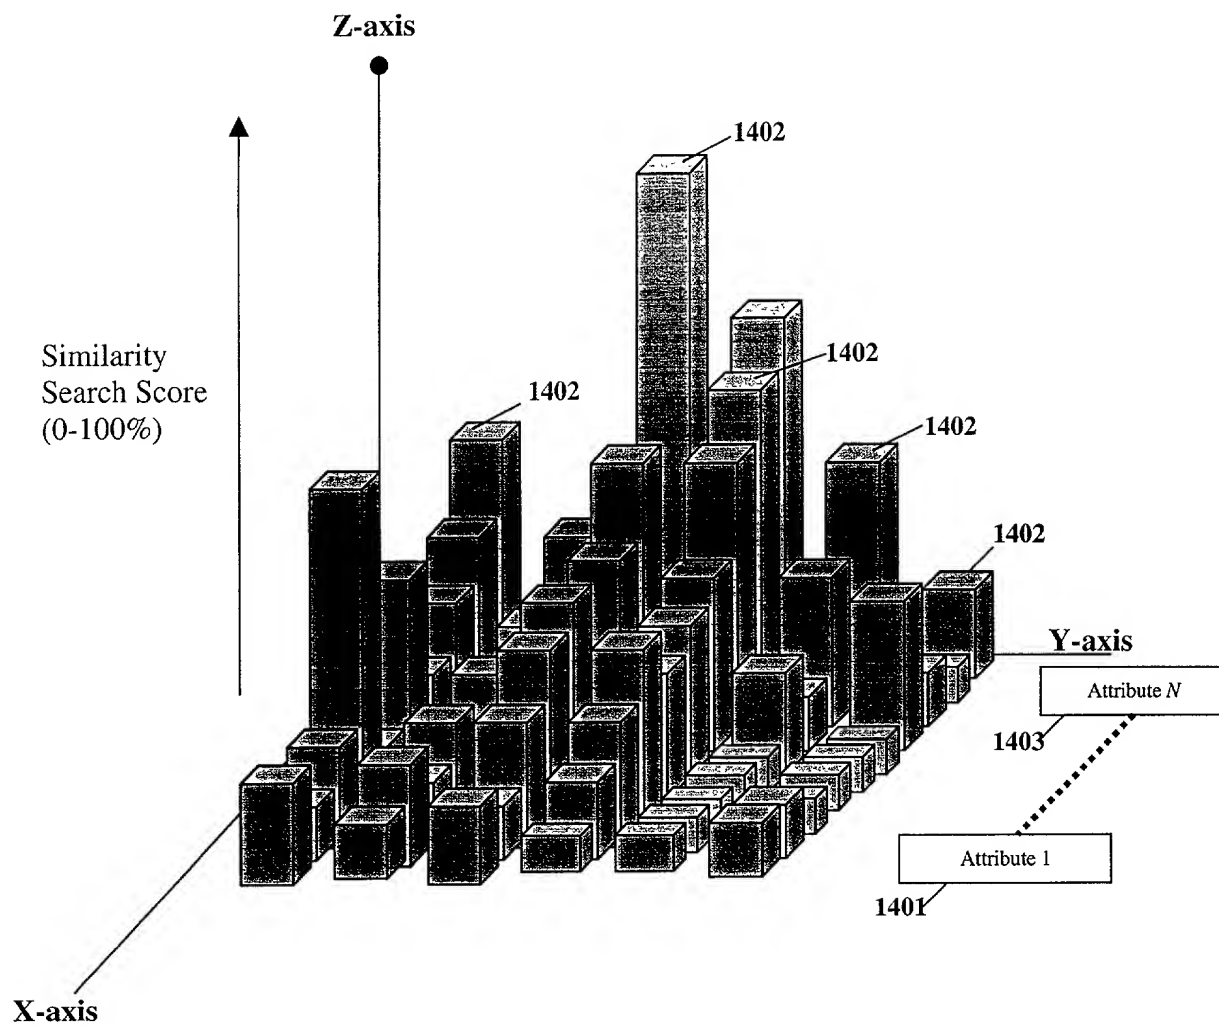


Fig. 14

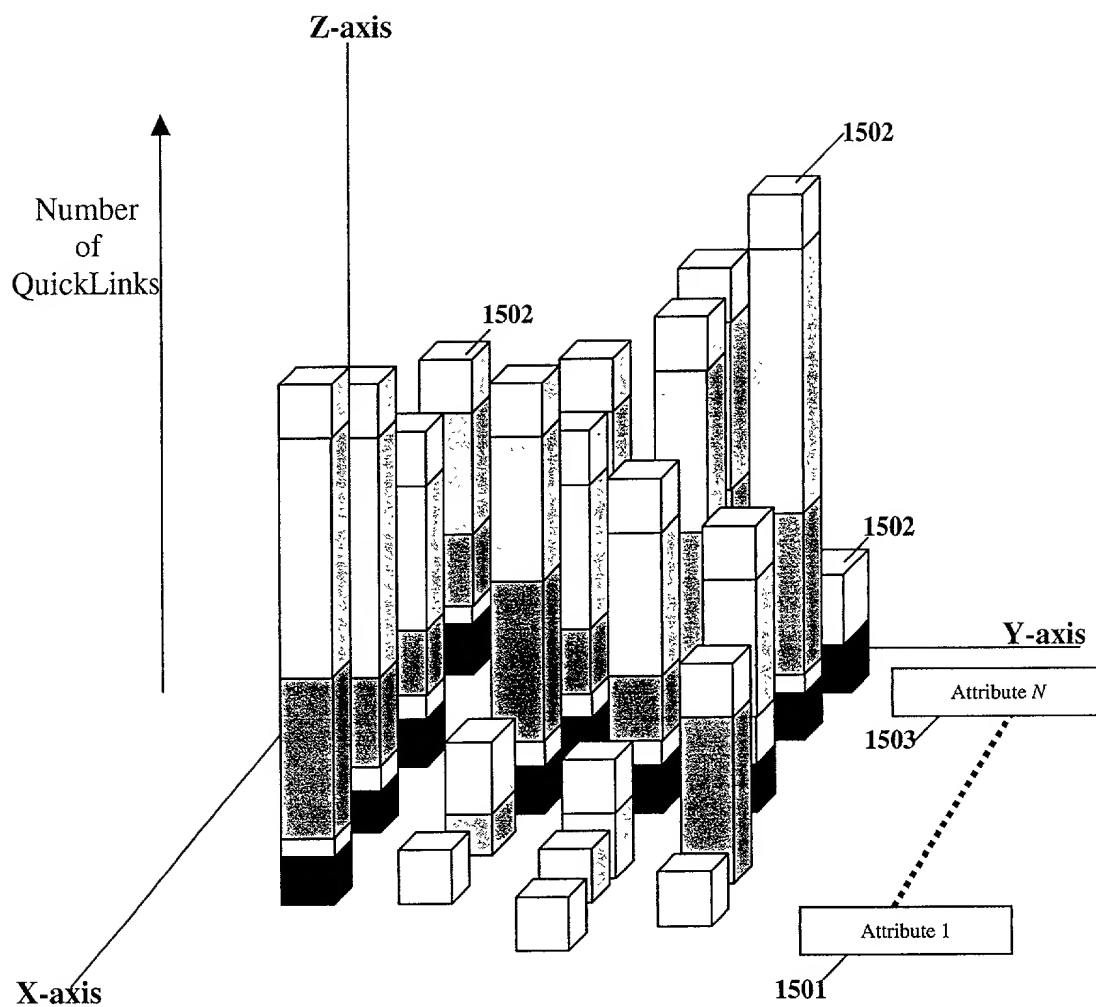


Fig. 15